




CHICAGO FITTINGS

A Series of Flexible Anodeless Risers for the After-the-Meter Market



Technical Information

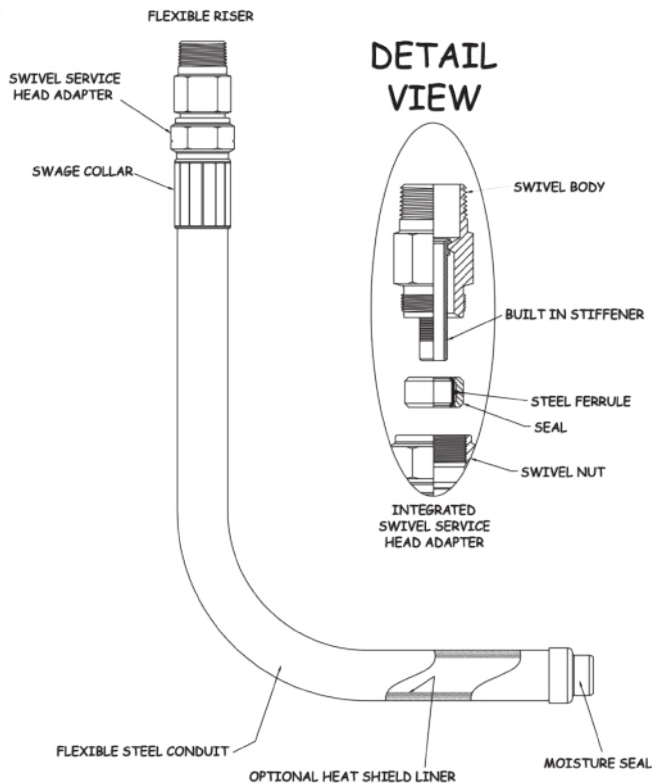

Features & Benefits

- **NO UNDERGROUND JOINTS** – One solid service line from point-to-point with above ground terminations.
- **NO CHAMFERING** – A simple clean cut is all that is required.
- **BI-DIRECTIONAL SEAL** assembly CAN'T be installed improperly where some competitors multiple internal components MUST have proper order and orientation to function properly.
- **NO TORQUE REQUIREMENTS** – All X-Risers incorporate the “bottoming” or “positive stop” design. Simply tighten the compression nut until it is metal-to-metal and you are done.
- **SIMPLE DESIGN** can be installed with one flat jaw wrench extending the life of protective coatings commonly flawed or removed by pipe wrenches.
- **INTEGRAL BARBED STIFFENERS** are permanent (not loose) for additional pull out resistance.
- **QUALITY** – Chicago Fittings products are CNC machined from solid bar stock (not castings) providing high quality product with the most precise threads and design flexibility.

Flexible Anodeless Risers for Natural Gas Applications

Part #	Outlet	Tube Size	Wall	SDR	Conduit Length (in.)
XR-10B-8-36-ZDC	1/2" MPT	1/2" CTS	.090"	7	36"
XR-10B-12-36-ZDC	3/4" MPT	1/2" CTS	.090"	7	36"
XR-13B-8-36-ZDC	1/2" MPT	1/2" IPS	.090"	7	36"
XR-18B-12-36-ZDC	3/4" MPT	1" CTS	.090"	12.5	36"
XR-18B-16-36-ZDC	1" MPT	1" CTS	.090"	12.5	36"
XR-18E-12-36-ZDC	3/4" MPT	1" CTS	.100"	11.3	36"
XR-18E-16-36-ZDC	1" MPT	1" CTS	.100"	11.3	36"
XR-17C-12-36-ZDC	3/4" MPT	3/4" IPS	.095"	11	36
XR-21J-16-36-ZDC	1" MPT	1" IPS	.119"	11	36
XR-27G-20-36-ZDC	1 1/4" MPT	1 1/4" IPS	.151"	11	36
XR-27H-20-36-ZDC	1 1/4" MPT	1 1/4" IPS	.166"	10	36
XR-31K-24-36-ZDC	1 1/2" MPT	1 1/2" IPS	.173"	11	36
XR-38M-32-36-ZDC	2" MPT	2" IPS	.216"	11	36

